


Product Features

IP-ZA3016

IP NETWORK ADAPTOR WITH 16 ZONES

- ❑ Able to display the program and connect analog power amplifiers for local broadcasting to 16 zones.
- ❑ Comes with 4.3-inch LCD screen in TFT colour, 37 industrial metal buttons, graphical volume adjustment interface for the volume of network programs, local MICs and local AUX.
- ❑ Integrated USB and Micro SD (TF) card interface, 2 independent audio output channels.
- ❑ Supports remote hardware updating of the terminal, multiple users' switching login and customize the using priority of user function
- ❑ Real-time display the status information on program broadcasting, two-way intercom, regular broadcasting, equipment operating, IP address, MAC address etc, and can be one-key stop programming task.

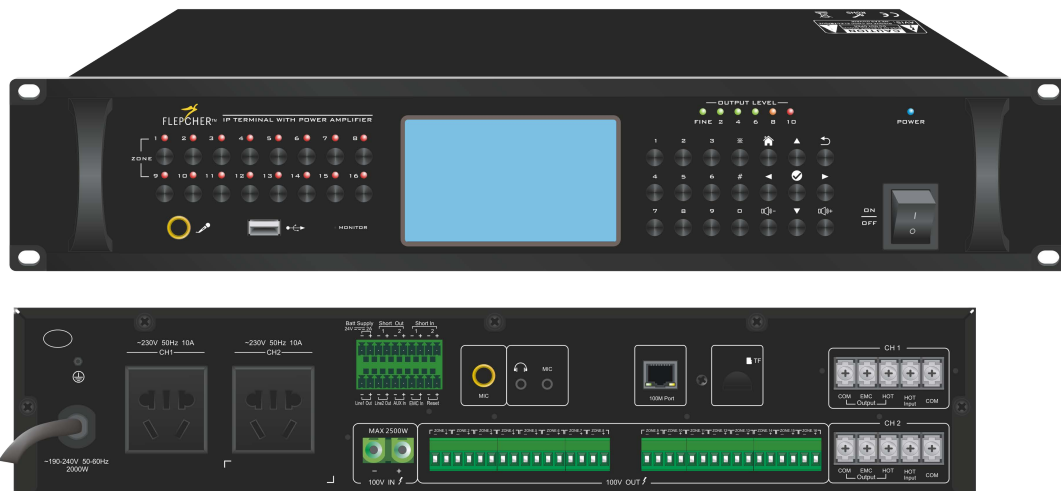

Technical Specifications

Network Interface & Transmission Rate	Standard RJ45 Input with 100Mbps
Communication Protocol	TCP/IP, UDP, IGMP (Multicast), IETF SIP
Sampling Rate	8k ~ 48kHz
AUX Input & Sensitivity	1 Group (350mV)
EMC Input & Sensitivity	1 Group (775mV)
MIC Input & Sensitivity	1 Group optional TRS interface or 3.5mm input (5mV / 10mV)
Line Output Level / Impedance	2 Groups (1000mV / 470 Ω)
Headphone Output Interface & Load	3.5mm interface & 32 Ω
USB / SD	MAX 4T USB device / MAX 128G SDXC card
Zone Load Rating	MAX 1000W
Power Consumption (Standby)	< 10W
Frequency Response	80Hz ~ 16kHz -3dB ± 1dB
THD	≤ 0.3%
SNR	> 68dB
Short Circuit	Support dry contact; Input: 0V/3.3V; Output: Max 1A/30VDC
Working Voltage	190V ~ 240V AC with 50Hz ~ 60Hz; DC 24V/1.5A
Working Temperature / Humidity	5°C ~ 40°C; 20% - 80% Relative humidity, without condensation
Size (L x D x H)	484 x 327.5 x 88 mm
Weight	4.6kg