


Product Features

- ❑ Up to 200m transmission distance between PMC-1001 and MXC-1002
- ❑ Individual gain controls for MIC
- ❑ Power level indicator
- ❑ Priority microphone broadcasting
- ❑ Bass and treble tone control
- ❑ Priority relay to override DC signal

MXC-1002

PRE-AMPLIFIER

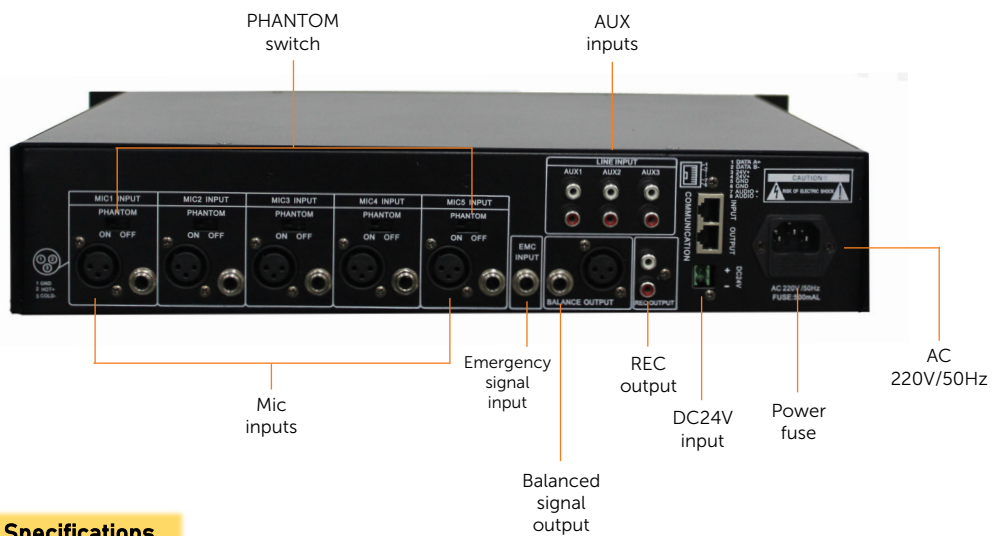

Technical Specifications

Input	MIC: 600Ω, ≤ 12mV, Unbalanced EMC: 10kΩ, ≤ 330mV, Unbalanced AUX: 10kΩ, ≤ 330mV, Unbalanced
Main Output	Main: 0.775V, 0dB, Balanced REC: 0.775V, Unbalanced
Frequency Response	60Hz – 15kHz
THD	< 0.5% at 1kHz
S/N Ratio	> 65dB
Tone	Bass: 100Hz (±10dB) Treble: 10kHz (±10dB)
Priority Level	PMC-1001 > EMC > MIC1,2,3,4,5 > AUX1,2
Function Control	9 Volume controller, Bass, Treble, Power Switch
Indicator	Power
Protection	AC Fuse 0.5A
Power Supply	AC220 – 240V @ 50/60Hz, DC 24V @ 500mA
Power Consumption	8W
Dimension (W x D x H)	483mm x 366mm x 89mm
Weight	5.96kg