


Product Features

PA-120BMKIII / 360BMKIII

POWER AMPLIFIER

- ❑ 100V / 70V constant voltage outputs with 4Ω speaker constant resistance outputs
- ❑ Reliable protection against overload, short-circuit and power fluctuation for optimum reliability
- ❑ Intelligent limiter
- ❑ Heat sinks and fan to protect against overheating
- ❑ Rubber pads and oblong mounting holes for easy installation
- ❑ Support DC 24V Power Supply

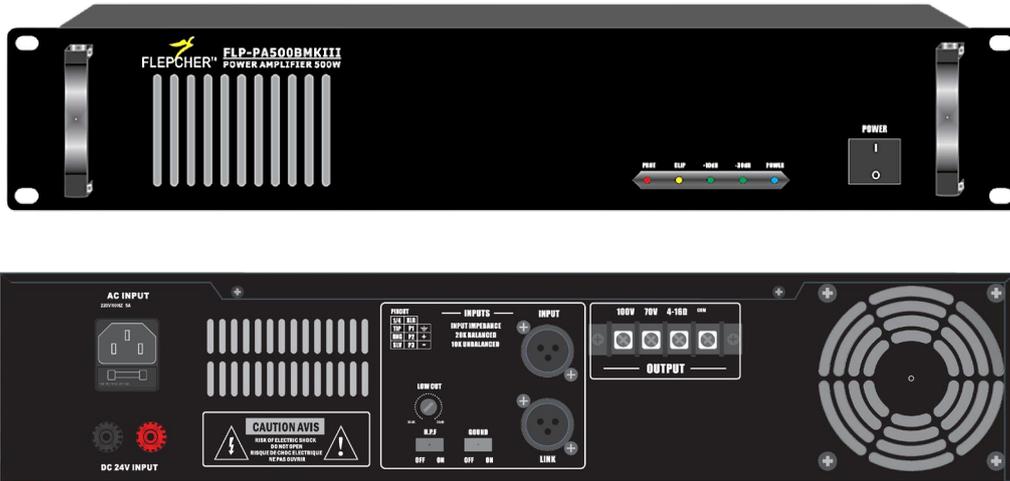

Technical Specifications

| Model | PA120BMKIII | PS360BMKIII |
|-----------------------|--|--------------------------|
| Rate Power AC220V | 120W | 360W |
| Rate Power DC24V | 120W | 360W |
| Frequency Response | 70Hz – 20kHz ± 1dB | |
| Low Cut | 300Hz ± 3dB | |
| THD | < 0.1% | |
| SNR | > 97dB | |
| Damping Factor | > 200 | |
| Slew Rate | > 20V / us | |
| Input Impedance | 10k / 20k | |
| Voltage Gain (8Ω) | 38dB | |
| Amplifier Type | Class AB | |
| Input Part | Balance Input XLR Female Socket, Unbalance Input XLR Male Socket | |
| | COM-22V(4Ω)- | COM-38V(4Ω)- |
| Output Part | 70V (40.8Ω)-100V (83Ω) | 70V (13.6Ω)-100V (27.8Ω) |
| Dimension (W x D x H) | 484mm x 410mm x 88mm | |
| Net Weight | 11kg | 17kg |
| Gross Weight | 12kg | 18kg |
| Power | AC 240V ± 10V / DC 24V (17-29V) | |