


## Product Features

# ZS-1012

## 12-CHANNEL ZONE SELECTOR

- ❑ The power capacity for one zone is 250W, making it 3000W for all 12 zones
- ❑ Powered by voltage supply of DC 24V
- ❑ Cascade-able up to 8 units of zone selector and 8 unit of PMC-1001 to manage max 96 zones
- ❑ An ALL CALL button for simultaneous activation of all zones
- ❑ A priority triggering port feature for connection to handheld emergency paging microphone
- ❑ Priority relay to override DC signal

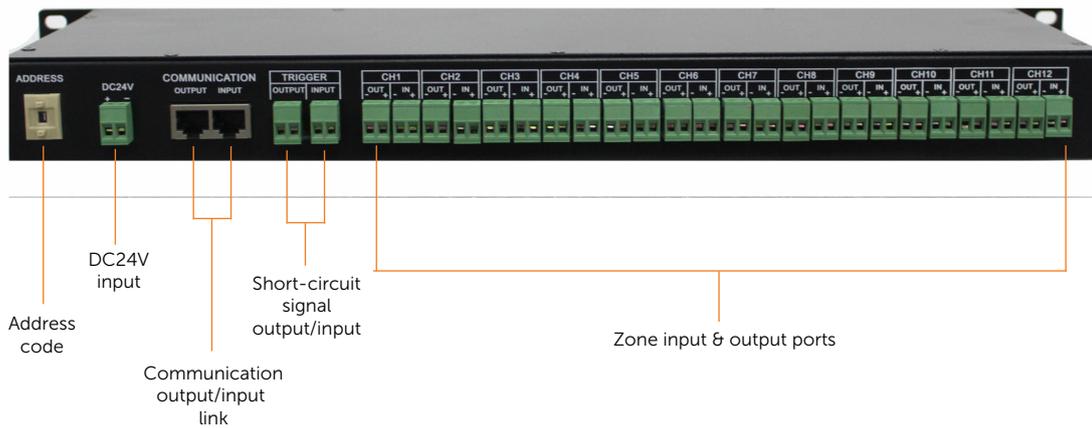

## Technical Specifications

Power Consumption	13W
Zone Load Rating	250W at 100V amplifier outline
Operating Voltage	24V DC @ $\geq 1A$
Cable Size	Up to 2.5mmsq
Dimension (W x D x H)	485mm x 155mm x 44mm
Weight	2.0kg
Finish	Black