


Product Features

MCS-500 MAIN CONTROLLER

- ❑ Manage up to 24 GROUPS, 256 ZONES.
- ❑ 1 EMC input, 2 Paging Station inputs, 1 MIC/LINE input, 1 AUX input, 1 channel output.
- ❑ 24 Groups Buttons, ALL and CLEAR buttons, volume control for AUX and MIC/LINE inputs.
- ❑ Automatic Fault Detection, automatic power failure detection
- ❑ Priority: EMC > Paging MIC > MIC/LINE > AUX
- ❑ Power Supply: 230V AC 50/60Hz, 24V DC

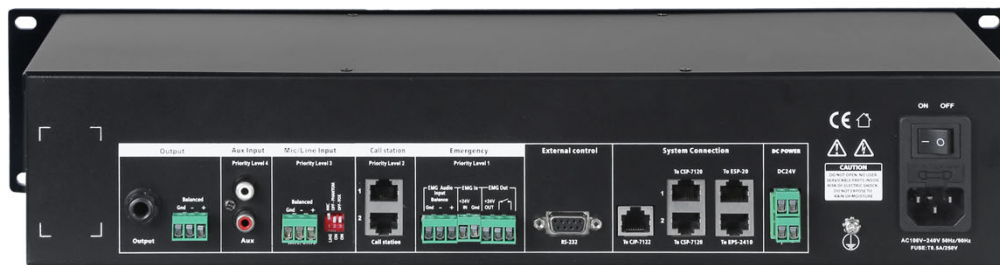

Technical Specifications

Features	Main Controller for PA-500 System
Audio Input	AUX: -10dB unbalanced MIC / LINE: -50dB / 0dB Balanced
Audio Output	Balanced Line: 0dB / 50kΩ
EMC Input	Audio In: -10dB / 50kΩ Control: DC 24V, dry contact
Paging Station Port	Balanced Line: 0dB / 50kΩ, RS-485
Priority	EMC > Paging > Preset Announcement > BGM
Power Supply	230V AC 50/60Hz, 24V DC
Dimension (W x D x H)	482mm x 355mm x 88mm
Weight	2.38 kg