


## Product Features

- ❑ With MP3 / Tuner / Bluetooth functions mixer amplifier and digital screen to display current music from USB
- ❑ Suitable for small scale application for paging and BGM
- ❑ Remote control over USB / Tuner / Bluetooth
- ❑ 1 MIC input, 2 MIC / LINE inputs, 2 LINE inputs with individual volume control
- ❑ Channel priority: MIC1 > MIC2 / LINE 1, MIC3 / LINE2, LINE3, LINE4
- ❑ MIC1, balanced input, build-in 48V phantom power and priority switch.

# MA-1120MKII/ MA-1240MKII

## MIXER AMPLIFIER with USB / Tuner / Bluetooth

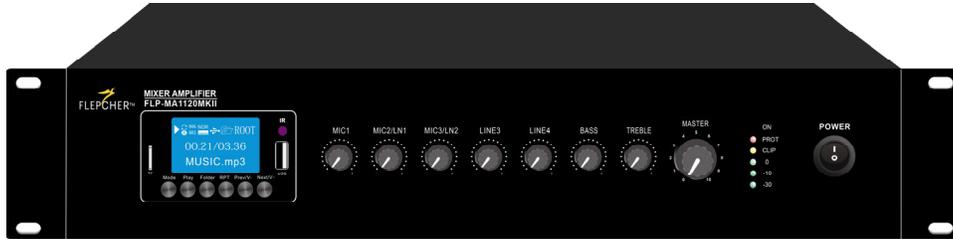

## Technical Specifications

Model	MA-1120MKII	MA-1240MKII
Rated Power	120W	240W
Output Power	70V/100V & 4/8/16Ω	
Input sensitivity	MIC: MIC1-3: 5-8mV, 600Ω; LINE: 150-470mV, 10KΩ	
Line Out	0.775 (0 dBV)	
Frequency Responses	60Hz-15kHz (± 3dB)	
SNR	Line ≥ 85dB, Mic ≥ 72dB	
THD	Less than 0.5%	
Protection Mode	Short-circuit, Clip, Overload, High Temperature Protection	
Voltage	~240V 50Hz	
Power Consumption	150W	310W
Weight	7.1kg	8.6kg
Dimension (W x D x H)	484mm x 405mm x 88mm	