

Product Features


- ❑ Control by resistive or transformer technology
- ❑ Unique low profile design
- ❑ 5 Positions (including OFF)
- ❑ High quality 5 step transformer system for excellent reliability
- ❑ 24V DC overriding function
- ❑ Durable outer cover for higher reliability

VC-505RF/5030WF /5060WF/5120WF

VOLUME CONTROL



VC-505RF

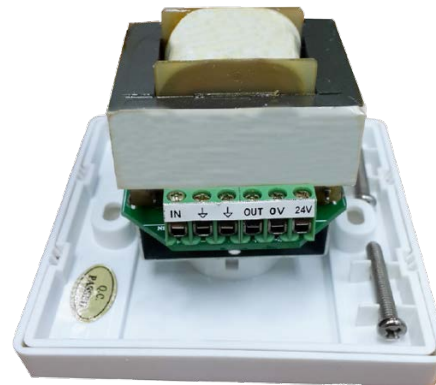

VC-5030WF/5060WF/5120WF

Technical Specifications

| Model | VC-505RF | VC-5030WF | VC-5060WF | VC-5120WF |
|--------------------------|---|---|---|---|
| Type | Resistive | Resistive | Resistive | Resistive |
| Power Rating | 6W | 30W | 60W | 120W |
| Overriding Signal | 24V DC 15mA | 24V DC 15mA | 24V DC 15mA | 24V DC 15mA |
| Attenuation | Step 1: OFF Step 2: -4dB Step 3: -1dB Step 4: -0.5dB Step 5: -0dB | Step 1: OFF Step 2: -17dB Step 3: -11dB Step 4: -4.5dB Step 5: -0dB | Step 1: OFF Step 2: -18dB Step 3: -11dB Step 4: 15dB Step 5: -0dB | Step 1: OFF Step 2: -17dB Step 3: -11dB Step 4: -5.5dB Step 5: -0dB |
| Frequency Response | 20Hz – 20kHz | 20Hz-20kHz | 20Hz-20kHz | 20Hz – 20kHz |
| Dimension (H x W x D) mm | 86 x 86 x 50 | 86 x 86 x 62 | 86 x 86 x 70 | 86 x 86 x 78 |
| Weight | 62g | 135g | 295g | 503g |
| Material & Finish | High Impact ABS in white | | | |