


Product Features

- ❑ Cater for 8 duty amplifiers and 1 standby amplifier
- ❑ High sensitivity and accurate fault detection function, less than 2 seconds for changeover time
- ❑ Able to use with 2 standby amp and each will cater 4 duty amplifiers
- ❑ Built-in microcomputer detection system and pilot-tone realize auto amplifier fault changeover
- ❑ Red colour LED indicator for fault alert

ACU-9081

AUTOMATIC CHANGEOVER UNIT

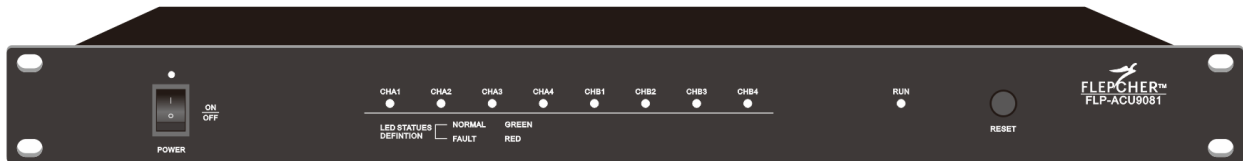

Technical Specifications

Power	AC220-240V/50-60Hz or DC24V
Power Consumption	< 18W
Detection Line	70 / 100V
Detection Level	50 Vrms min
Load Rating	1500W / 100V
Indicators	Green LED for main channel Red LED for changeover
Dimension (W x D x H)	485mm x 350mm x 44mm
Weight	3.3kg
Finish	Black