


## Product Features

- ❑ Ability to monitor up to 12 amplifier outputs
- ❑ 12 LED Channel Indicators and 5-segment LED level meter for visual monitoring
- ❑ 12 Inputs for 70/100V line amplifier outputs
- ❑ 1W speaker with volume control for audio monitoring
- ❑ Can be used as a tool to calibrate sound output level for each amplifier
- ❑ Easy installation with 1U design

# MP-9012

## 12 CHANNELS MONITOR PANEL

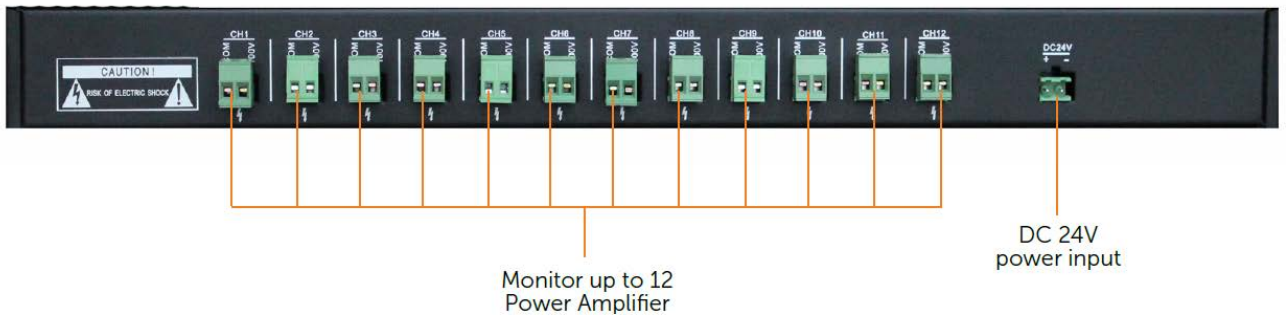

## Technical Specifications

Power Supply	24V DC
Power Consumption	< 50mW
Input Channel	12 Channels
Input Signal Voltage	70V / 100V
Audio Monitoring	1W Speaker with Volume Controller
Visual Monitoring	Output Signal LED Meter
Dimension (W x L x H)	484mm x 245mm x 44mm
Weight	5kg